

VERACRUZ 2-VALVE SHOWER SET

Cat. No.
110/47



2-Valve Shower Set



Valve spread: 8"

Shower arm reach: 7 3/4"

Holes to drill in wall: 1 1/4"

-
- Cleaning and Care Instructions:
- We recommend you wipe your faucets dry after every use. This will prevent accumulation of mineral deposits left when water evaporates. Use a soft cloth for wiping all surfaces.
 - Avoid harsh and abrasive cleaners on all faucet surfaces. Use only a soft, damp cloth with mild liquid soap to clean the finished surfaces of all faucets, including coated polished brass, gold, brushed nickel, etc.
 - Painted and plated surfaces alike, should be coated regularly with a thin protective film. Non-abrasive liquid car wax is recommended.
-

Features

- ▶ All brass construction
- ▶ Ceramic quarter turn disc cartridges
- ▶ Includes reversible fittings with for threaded or sweat water connection
- ▶ 25 year limited warranty on mechanical components
- ▶ 7 year warranty on finishes (Oil Rubbed Bronze is a living finish and therefore is covered under warranty for only 1 year).

Finishes

| | |
|----|-------------------|
| CR | Chrome |
| PE | Brushed Nickel |
| RU | Oil Rubbed Bronze |


Compliance Certification:

Meets or exceeds the following specifications:
ASME A112.18.1-2003

.....

We recommend that you check all water connections for leaks before closing the wall.

.....

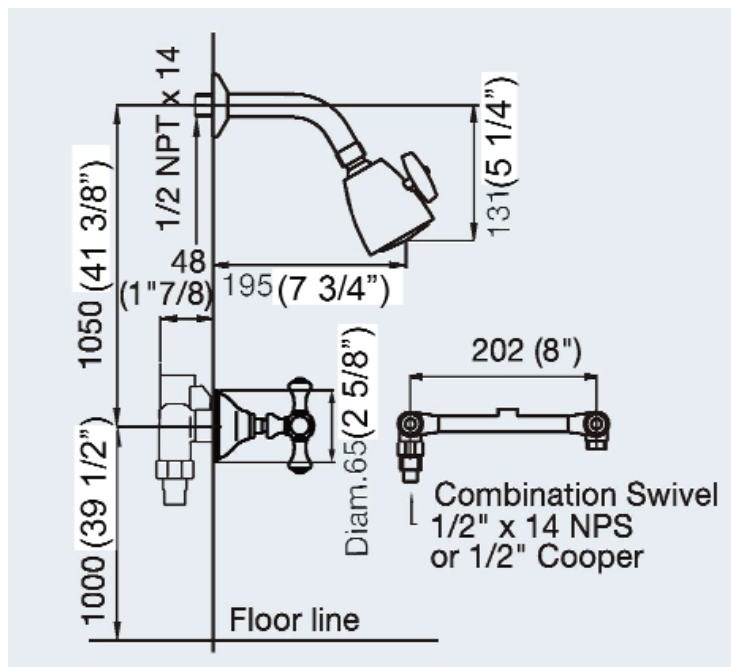

Center of feed line to outside edge of wall:
Min. 1 11/16"
Max. 2 3/4"

Dimensions and specifications subject to change without notice.